

Clocks for Large Spaces

on-wall mounting, indoor



Large space
analog
single face

Type series
370



Also available
"resistant
to thrown balls"



71.370.511 shown

Clocks of this type series are excellently suited for all applications requiring large clocks with **solid, industrial grade metal cases** combined with a doubt-free readability.

They are also available "resistant to thrown balls" according to DIN 18032, part 3.



53.370.511 -59

▲ DCF77 radio controlled clock with large second hand, enamelled red, resistant to thrown balls version.



72.370.611 -22

▲ Clock cases made of stainless steel V4A, blasted and varnished (optional) are resistant to saline or chlorous media. Excellently suited for permanent use in public swimming pools.

Case

- cir. 400x400 mm
- cir. 500x500 mm
- cir. 600x600 mm

very sturdy metal case, enamelled white (RAL 9016). Optionally, at a surcharge, custom enamelled, as listed below. A stainless steel case (1.4301 X5CrNi 18-10, German trade name V2A) with a matted finish or a stainless steel case (1.4571 X6CrNiMoTi 17-12-2, German trade name V4A), blasted and additionally coated with a protective varnish, are available as options. Protection grade IP 40 (EN 60 529).

Resistance to thrown balls acc. to DIN 18 032, part 3 (option)

Clocks of this type series are also available resistant to thrown balls and thus suitable for schools, gymnasiums and other sporting facilities. Very sturdy metal case with 6 mm two-ply laminated mineral safety glass. These clocks conform to German Industry Standard and are certified and

labelled "resistant to thrown balls according to DIN 18 032, part 3".

Front glass

Flat shock-resistant Plexiglas® XT (PMMA) as standard.

Packaging (option)

As an option, clockwork packaged to protect it against blown dust and/or sprayed water (IP 54 according to EN 60 529) is available.

Face

High distinction white metal with large black Arabic numerals for easy, doubt-free reading even over longer distances. Visible print diameters are 335 mm, 420 mm, and 503 mm respectively. Face printed according to DIN 41 091.

Radio controlled clocks of this type series are equipped with a plastic face for improved radio reception.

Hands

Black bar-type hour and minute hands.


Red second hands only on DCF77 radio controlled clocks with large second hands (53.xxx and 54.xxx), on slave clocks with minute/second pulse (72.xxx), and on slave clocks with synchronous second hands (74.xxx).

Stainless steel V4A (option)

Due to its components stainless steel V4A is an alloy almost completely impervious to detergents and disinfectants and is therefore excellently suited for the use in the food and pharmaceutical industries, in kitchens, laboratories and other clean rooms. And it looks good into the bargain, as well!

Stainless steel V4A + varnish (option)


V4A quality stainless steel with an additional coat of protective varnish is outstandingly resistant to acids and other chlorous media and is therefore particularly suited for public swimming pools as well as for the chemical industry.



Large space analog single face

Type series

370

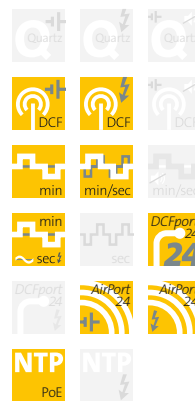

PEWETA DCPort24

PEWETA DCPort24 slave clocks require a PEWETA master clock (see from page 178 on).

PEWETA AirPort24

PEWETA AirPort24 slave clocks require an AirPort24 transmitter or repeater respectively (see page 183).

NTP

NTP system clocks require a PEWETA master clock (see from page 178 on) or an NTP time server (see page 185).

Clock type	Face dimensions ▶	400 x 400 mm		500 x 500 mm		600 x 600 mm	
		Item No.	€ each	Item No.	€ each	Item No.	€ each
DCF77 radio controlled clock, battery operated 2x 1.5 V ¹⁾		51.370.411	489.–	51.370.511	909.–	51.370.611	1,039.–
DCF77 radio controlled clock, mains operated 230 VAC		52.370.411	569.–	52.370.511	949.–	52.370.611	1,079.–
Slave clock, minute pulse 12...60 V		71.370.411	459.–	71.370.511	579.–	71.370.611	709.–
Slave clock, minute/second pulse 12/24 V		72.370.411	704.–	72.370.511	824.–	72.370.611	954.–
Slave clock, minute pulse 12/24 V, synchronous second hand 230 VAC/50 Hz		74.370.411	869.–	74.370.511	989.–	74.370.611	1,119.–
Telegram slave clock, DCPort24, 24 V		81.370.411	494.–	81.370.511	669.–	81.370.611	799.–
RC telegram slave clock, AirPort24, battery operated 2x 1,5 V ¹⁾		84.370.411	613.–	84.370.511	794.–	84.370.611	924.–
RC telegram slave clock, AirPort24, mains operated 230 VAC		85.370.411	673.–	85.370.511	834.–	85.370.611	964.–
NTP system clock (NTP client), synchronisation by LAN, PoE ²⁾		91.370.411	643.–	91.370.511	899.–	91.370.611	1,029.–

DCF77 radio controlled clocks with large second hands ³⁾	Face dimensions ▶	400 x 400 mm		500 x 500 mm		600 x 600 mm	
		Item No.	€ each	Item No.	€ each	Item No.	€ each
DCF77 radio controlled clock, battery operated 2x 1.5 V ¹⁾		not available		53.370.511	1,059.–	53.370.611	1,189.–
DCF77 radio controlled clock, mains operated 230 VAC		not available		54.370.511	1,099.–	54.370.611	1,229.–

Options	400x400mm Suffix	Surcharge € each	500x500mm Suffix	Surcharge € each	600x600mm Suffix	Surcharge € each
Case enamelled in metallic silver grey RAL 9006	-05	39.–	-05	49.–	-05	59.–
Case enamelled in metallic dark gun metal DB 703	-06	39.–	-06	49.–	-06	59.–
Case custom enamelled	-10	on request	-10	on request	-10	on request
Case stainless steel V4A, matted finish	-21	on request	-21	on request	-21	on request
Case stainless steel V4A, blasted and varnished	-22	on request	-22	on request	-22	on request
Custom logo on clock face	-47	on request	-47	on request	-47	on request
Packaging against dust and spray (IP 54)	-54	80.–	-54	80.–	-54	80.–
Resistance to thrown balls acc. to DIN 18032, part 3	-59	179.–	-59	179.–	-59	179.–
External DCF77 receiving aerial (cannot be added later)	-60	169.–		fitted as standard		fitted as standard

Options – just as you like them ...

These clocks are available optionally with customised features at the surcharges as listed. Just pick your option(s) and add the appropriate suffix(es) to the Item No.

Case colour	Suffix
metallic silver grey RAL 9006	-05
dark gun metal DB 703	-06
custom enamelled	-10
stainless steel V4A, matted finish	-21
stainless steel V4A + clear varnish	-22

¹⁾ Alkaline batteries are included in delivery shipment (medium lifespan: cir. 4 years).

²⁾ NTP system clocks of "PoE" type require a PoE (Power over Ethernet) power supply. Appropriate hardware has to be supplied by customer.

³⁾ DCF77 radio controlled clocks with Item Nos. 53.370... and 54.370... will be supplied with large second hands, enamelled red.