

Analog Clocks with LCD Date Display

ideal for offices, conference rooms, and reception areas



Classic analog clock combined with a high definition, high contrast LCD display showing the date.


Case
Extra flat, sturdy metal case, enamelled metallic silver.

Analog clock
Mechanical analog time display, face with black bar markings, print diameter cir. 380 mm. Exposed, black bar-type hands indicating hours and minutes, no front glass.

LCD digital display
Single line alphanumeric 42-segment LCD display, 12 digits, character height 40 mm, showing the date. Various date display formats can be selected by menu. Optionally, room temperature may be displayed alternating with the date.

Indoor
analog/digital
single-sided

Type series
570

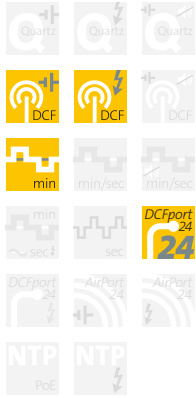

DCF77 radio controlled clocks
DCF77 radio controlled clocks will only function correctly within a radius of approx. 1,500 km around Mainflingen (50 km east of Frankfurt/M.) and under conditions of free radio propagation and may be impaired in heavily reinforced concrete structures. For this case we recommend a remotable DCF77 aerial (option).

PEWETA DCFport24
PEWETA DCFport24 slave clocks require a PEWETA master clock (see from page 178 on).



52.570.791 shown

| Technical data | | |
|--|------------------------------|-------------------------|
| Case | material | aluminium |
| | colour | metallic silver |
| | dimensions (W x H x D) | cir. 430 x 525 x 30 mm |
| Display | face diameter | 380 mm |
| | cipher/character height date | 40 mm |
| | reading distance | cir. 20 m |
| Weight | | cir. 2.4 kg |
| Clock type | | |
| | Item No. | € each |
| DCF77 radio controlled clock, battery operated 1.5 V | 51.570.791 | on request |
| DCF77 radio controlled clock, mains operated 230 VAC | 52.570.791 | on request |
| Slave clock, minute pulse 12/24 V ¹⁾ | 71.570.791 | on request |
| Telegram slave clock, DCFport24, 12/24 V ²⁾ | 81.570.791 | on request |
| Accessory | | |
| | Item No. | € each |
| External DCF77 receiving aerial (IP 31), for radio controlled types (required only if reception quality is poor) | 03.925.171 | on request |
| Options | | |
| | Suffix | Surcharge € each |
| Integrated power supply for 230 VAC mains operation instead of battery operation (on clock type 71.xxx only) | -69 | on request |
| Alternating room temperature display (internal temperature sensor) | -91 | on request |
| Alternating room temperature display (external temperature sensor, IP 31) | -92 | on request |

¹⁾Operation of the LCD display requires batteries (LR 6/AA type, included in delivery shipment) or an integrated power supply (optional).

²⁾Operating voltage is supplied by the master clock via DCFport24 telegram (current draw cir. 10 mA).